

Directional Coupler


Features

- wideband, 5-1000 MHz
- low mainline loss, 0.8 dB typ.
- high directivity, 40 dB typ.
- aqueous washable

Applications

- communications
- cable tv

HT-ADC-10-4+



50Ω 5 to 1000 MHz

Directional Coupler Electrical Specifications

FREQ. (MHz)	COUPLING (dB)		INSERTION LOSS dB		DIRECTIVITY (dB)		VSWR (:1)	POWER INPUT, W
	Nom.	Flatness	Min.	Max.	Min.	Max.	Typ.	Max.
5-1000	10.5±0.5	±1.0	0.8	1.5	13	40	1.20	1.0

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C

Permanent damage may occur if any of these limits are exceeded.


Pin Connections

INPUT	1
OUTPUT	6
COUPLED	3
GROUND	2
50Ω TERM EXTERNAL	4
ISOLATE (DO NOT USE)	5


Typical Performance Data

Freq. (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		
				In	Out	Cpl
5.00	0.73	10.45	39.49	22.96	30.01	20.21
10.00	0.72	10.44	41.58	23.49	31.11	20.71
50.00	0.73	10.47	46.29	23.98	31.76	20.95
200.00	0.79	10.62	43.84	22.59	26.52	18.33
300.00	0.82	10.73	34.95	21.24	24.15	16.40
500.00	0.89	10.94	25.53	19.19	20.98	13.59
700.00	0.97	11.12	19.79	18.06	19.06	11.89
800.00	1.02	11.18	17.70	17.82	18.42	11.33
900.00	1.08	11.22	15.83	17.78	17.99	10.91
1000.00	1.17	11.24	14.27	17.91	17.72	10.60

Outline Drawing






PCB Land Pattern




Suggested Layout,
Tolerance to be within ±0.5

Outline Dimensions: Unit (mm)

A	8.70	J	8.00
B	6.50	K	1.50
C	2.54	G	5.50
D	1.30	H	4.30
E	5.40	L	2.54
F	6.50	M	2.00
WT	0.5g		

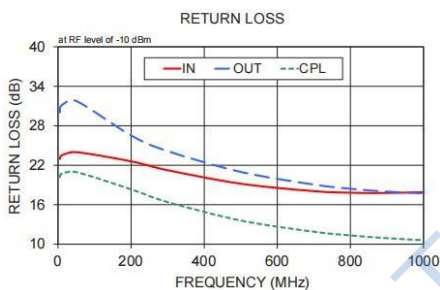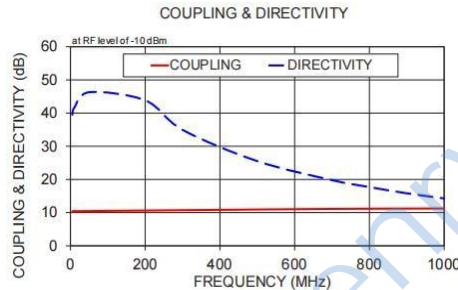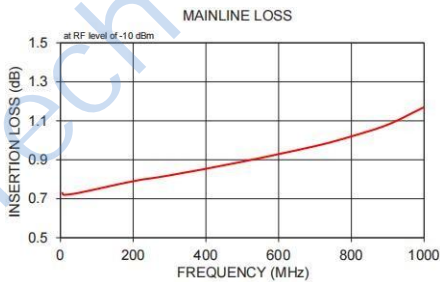

Electrical Schematic



* ELECTRICAL SCHEMATIC IS FOR DIRECTIONAL COUPLER WITH INTERNAL TRANSFORMER(S) AND EXTERNAL TERMINATION.